





IR FLOOR 1PY 230V (*)
IR FLOOR 2PY 230V(**)
IR FLOOR 3PY 400V(**)

CARATTERISTICHE

Potenza radiante radiale relativa in %
Radiant power radial relative %

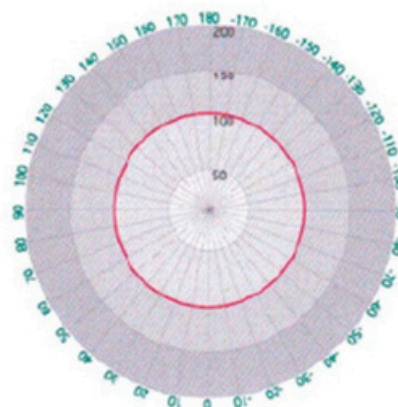

Emettitore SENZA riflettore
Emitter WITHOUT reflector

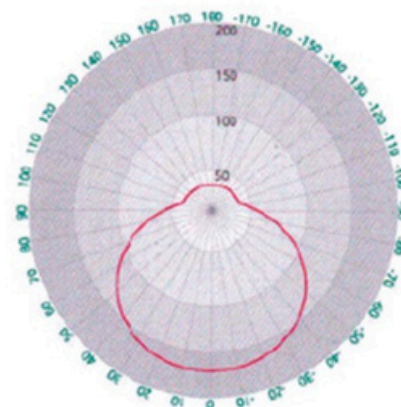


Emettitore CON riflettore
Emitter WITH reflector

CARATTERISTICHE	UNITA'	IR FLOOR 1PY	IR FLOOR 2PY	IR FLOOR 3PY
ALIMENTAZIONE	V	230	230	400
TENSIONE NOMINALE	HZ	50/60	50/60	50/60
EMISSIONE	λ	ONDE CORTE	ONDE CORTE	ONDE CORTE
MAX POTENZA	W	1X1500	2X1500	3X1500
TEMP.OPERATIVA(***)	C°	-10 ÷ +40	-10 ÷ +40	-10 ÷ +40
DIMENSIONI	mm	2400X600X500	2400X600X800	2400X600X700




IR FLOOR 1PY 230V (*)
IR FLOOR 2PY 230V(**)
IR FLOOR 3PY 400V(**)

Potenza radiante radiale relativa in %
Radiant power radial relative %

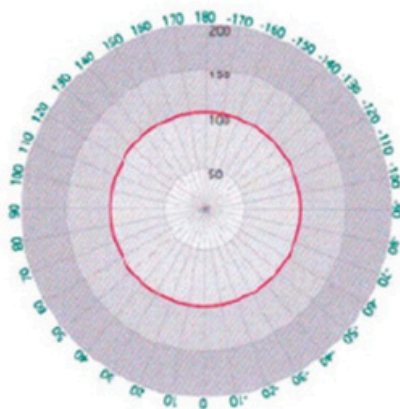

Emettitore SENZA riflettore
Emitter WITHOUT reflector

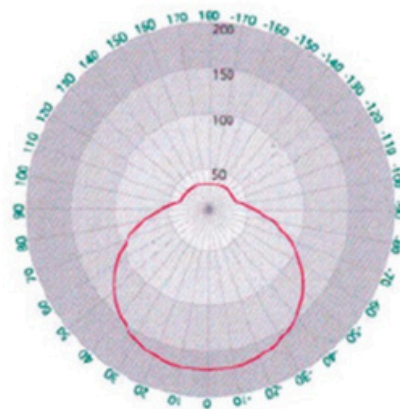

Emettitore CON riflettore
Emitter WITH reflector

TECHNICAL SPECIFICATIONS	UNIT	IR FLOOR 1PY	IR FLOOR 2PY	IR FLOOR 3PY
POWER SUPPLY	V	230	230	400
RATED VOLTAGE	HZ	50/60	50/60	50/60
EMISSION	λ	SHORT WAVES	SHORT WAVES	SHORT WAVES
MAX. POWER	W	1X1500	2X1500	3X1500
OPERATING TEMPERATURE(***)	C°	-10 ÷ +40	-10 ÷ +40	-10 ÷ +40
DIMENSIONS	mm	2400X600X500	2400X600X800	2400X600X700