





UCP FLY 15
UCP FLY 20
UCP FLY 25

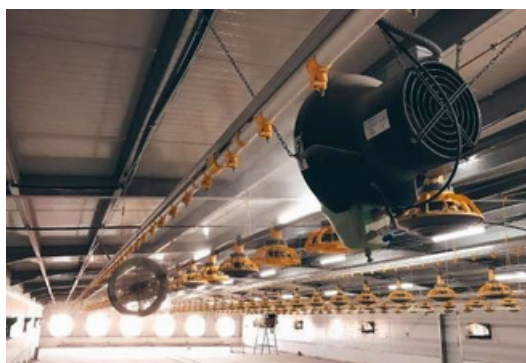

CARATTERISTICHE


L'UCP Fly è un'unità compatta che con un unico motore ventila, umidifica e può essere utilizzato come raffrescatore adiabatico. Grazie ai suoi materiali è resistente alla corrosione e si adatta anche agli ambienti più ostili. Ideale per essere impiegato in locali zootecnici di piccole e medie dimensioni come stabulari, incubatoi, pulcinai e in tutti i casi dove si necessita di abbassare la temperatura o nebulizzare disinfettanti. Nell'agricoltura umidifica fungaie, celle frigorifere di stoccaggio o per trattamenti disinfestanti. Ideale anche nel settore industriale nei locali dove è necessario mantenere l'umidità controllata.

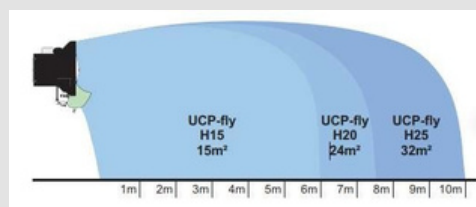

CARATTERISTICHE	UNITA'	H15	H20	H25
CAPACITA' DI ATOMIZZAZIONE	lit/h	FINO A 25	FINO A 25	FINO A 25
ALIMENTAZIONE ELETTRICA	-	1 ~	1 ~	1 ~
PESO	Kg	10	10	10
PORTATA D'ARIA	m³/h	750	1100	1800
CARATTERISTICHE ELETTRICHE				
POTENZA ASSORBITA	W	320	340	380
TENSIONE	V	230	230	230
CORRENTE	A	1.8	1.9	2.0
FREQUENZA	Hz	50	50	50
GRADO DI PROTEZIONE	IP	55	55	55



UCP FLY 15
UCP FLY 20
UCP FLY 25

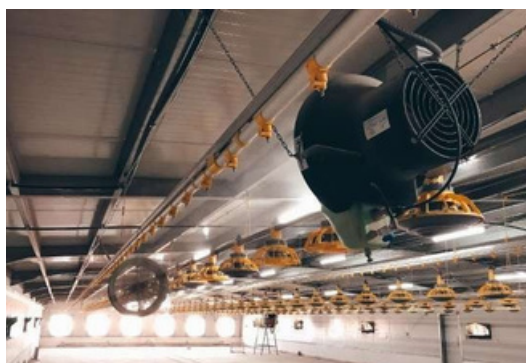


FEATURES

The **UCP Fly** is a compact unit that, with a single motor, provides ventilation, humidification and can also be used as an adiabatic cooler. Thanks to the materials used, it is resistant to corrosion and is suitable even for the most demanding environments.

It is ideal for use in small and medium-sized livestock facilities such as stables, hatcheries and poultry houses, and in all situations where it is necessary to reduce temperature or nebulize disinfectants. In agriculture, it is used to humidify mushroom growing rooms, refrigerated storage cells, or for disinfection treatments.

It is also ideal for industrial applications in areas where controlled humidity levels are required.

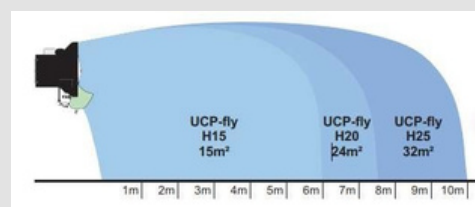

TECHNICAL SPECIFICATIONS	UNIT	H15	H20	H25
ATOMIZATION CAPACITY	lit/h	UP TO 25	UP TO 25	UP TO 25
POWER SUPPLY	-	1 ~	1 ~	1 ~
WEIGHT	Kg	10	10	10
AIRFLOW	m³/h	750	1100	1800
ELECTRICAL SPECIFICATIONS				
POWER INPUT	W	320	340	380
VOLTAGE	V	230	230	230
CURRENT	A	1.8	1.9	2.0
FREQUENCY	Hz	50	50	50
DEGREE OF PROTECTION	IP	55	55	55